

The geometrie of the keelfin can be seen from the IGES-file 'HA370-keelfin.IGS'

KEEL T = 1950 mm

WEIGHT

FIN CAST IRON approx. 800 KG
BULB LEAD approx. 1388 KG

MATERIALS


LEAD WITH 3% ANTIMON
BOLTS V4A TENSILE STRENGTH MIN 235 N/QMM
CAST IRON TENSILE STRENGTH MIN 80 N/mm²

NOTE: Upper keel part taken from HA371 deep keel. The top surface must be adapt to the new hull shape

NOTE: Keel upper part not final!

X Position: 5000

DWL

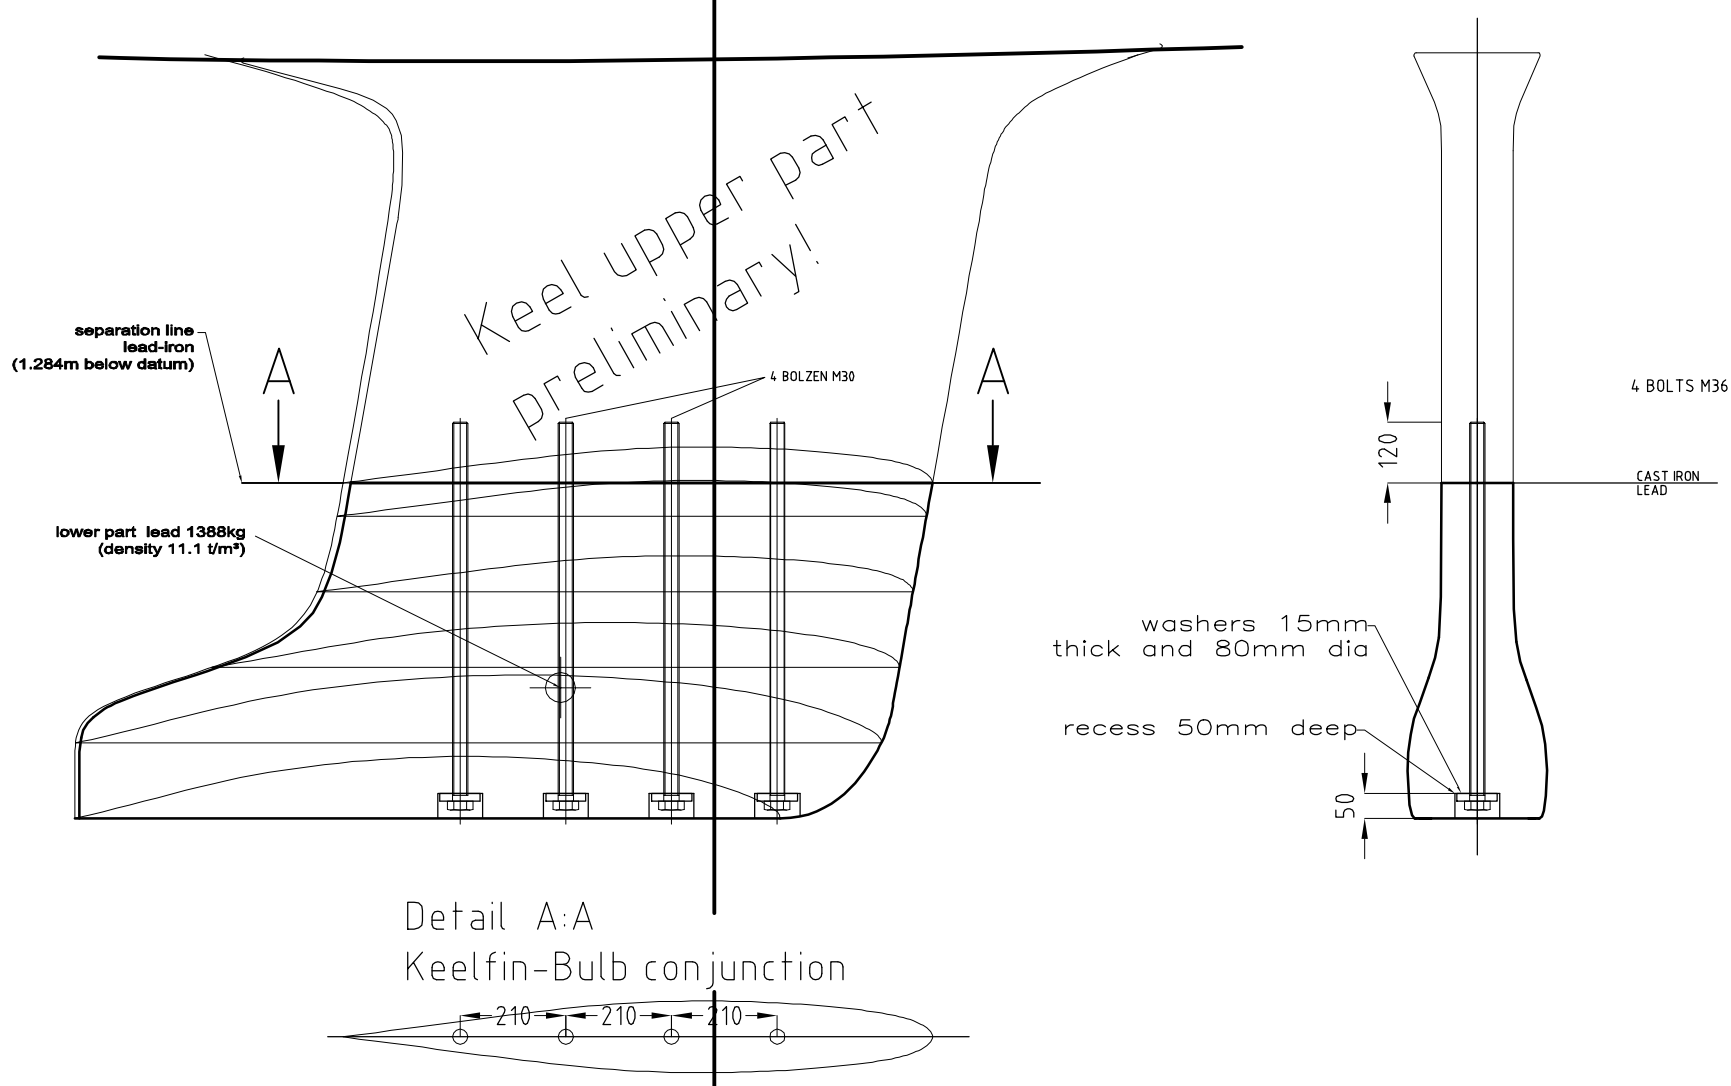

Detail A:A
Keelfin-Bulb conjunction

1	first issue	27-05-05	rk	
ISSUE	MODIFICATION	DATE	DRAWN BY	APPROVED

judel/vrolijk & co - PROPRIETARY
THE INFORMATION CONTAINED HEREON IS STRICTLY CONFIDENTIAL AND IS SUBJECT TO A CONFIDENTIALITY AGREEMENT AND A PERSON USING OR DISCLOSING THE INFORMATION CONTAINED HEREON IN BREACH OF SUCH AGREEMENT SHALL BE SUBJECT TO AN ACTION TO ENJOIN SUCH USE AND A SUIT FOR DAMAGES.

DUE TO BUILDING TOLERANCES ALL DIMENSIONS GIVEN ON THIS DRAWING ARE TO BE CHECKED ON THE BOAT !

Hanse 370

construction keelfin

1 : 15	mm
SCALE	DIMENSION
HA370-keel-CKD-deep	1 OF 1
DRAWING NUMBER	SHEET

judel/vrolijk & co - engineering gmbh

AM SEEDEICH 45
D-27572 BREMERHAVEN
GERMANY

TELEFON +49(0)471 97 123 95
TELEFAX +49(0)471 97 123 96
E-mail: info@judel-vrolijk.com