

► 7/8 TÊTE DE MÂT RÉTREINT / 7/8 MASTHEAD TAPERED

2004

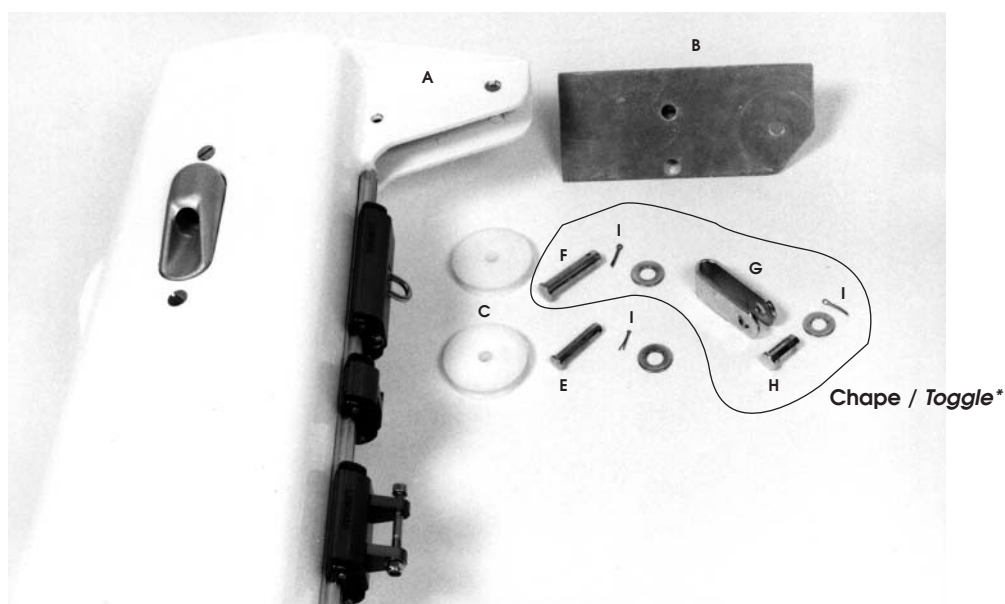
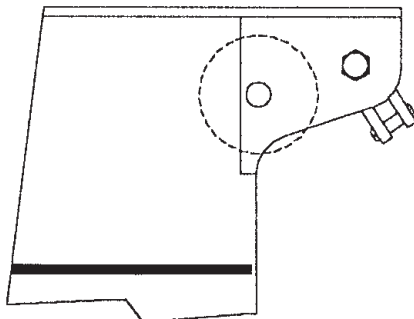


Tableau des rétreints standards / Taper chart

		F135	F195	F305	F385	F460	F580	F740	F1060	F1395	F2390	F3360
LONGUEUR	GRÉEMENT EN TÊTE MAST HEAD RIG	1500	1500	1750	1750	1750	2000	2000	2250	2250	2250	3000
	GRÉEMENT 7/8 7/8 RIG	1750	1750	2000	2250	2250	2500	2500	2750	2750		

RÉFÉRENCES		F135		F195		F305		F385		F460		F580		F740		F1060		F1395	
SECTION n°	BODY n°	4	3	3	3	3	3	3	3	3	3	3	6	6					
LONGUEUR mm	LENGTH mm	263	306	314	321	323	325	333	405	429									
CODE COMPLET	COMPLETE CODE	30004032635	30003033062	30003033145	30003053215	30003023235	30003053255	30003033335	30006034055	30006034295									
DESIGNATION	DESCRIPTION	CODE	QT	CODE	QT	CODE	QT	CODE	QT	CODE	QT	CODE	QT	CODE	QT	CODE	QT	CODE	QT
A	CORPS BODY	30004032633	1	30003033062	1	30003033142	1	30003053213	1	30003053232	1	30003053253	1	30003033333	1	30006034052	1	30006034292	1
B	CLOISON CHEEK	30004152633	1	30003113065	1	30003113145	1	30003153215	1	30003113245	1	30003153255	1	30003133335	1		1		1
C	REAS SHEAVES	48510481215	2	48510801525	2	48510901625	2	48510801525	2	48510801525	2	48510801525	2	48510801525	2	48510801525	2	48510801525	2
	CACHE AXE PIN PROTECTION							41201501044	1										
	GOUPIILLE SAFETY PIN	28803032200	1	28803032200	1	28803032200	1			28803032200	1	28803032200	1	28803032200	1	28803032200	1	28803032200	1
G	AXE DE TÊTE PIN	40020210040	1	40020112065	1	40020214054	1	27001012300	1	40020212052	1	40020212052	1	40020112065	1	40020112065	1	40020112065	1
OPTION FERRURE DE SPI																			
K	FERRURE DE SPI SPI CRANE	30015100944	1	30016120944	1	30016120944	1	30016120944	1	30016120944	1	30016120944	1	30016120944	1	30017141324	1	30017141324	1
L	VIS SCREWS	28600706016	6	28600706016	6	28600706016	6	28600706016	6	28600706016	6	28600706016	6	28600706016	6	28600706020	8	28600706020	8
M	ECROU INDES. NYLOC NUTS	28600506000	6	28600506000	6	28600506000	6	28600506000	6	28600506000	6	28600506000	6	28600506000	6	28600510000	8	28600510000	8

Réf. chape : voir page 5 / Toggle : see page 5.